

FRONTLINE



Model#: FRO-E12
Heavy-Duty Symmetric 2-Post Lift
12,000 lb. capacity


* Frame Engaging Adapters(10314 or 10318) are
REQUIRED when lifting trucks or other frame vehicles.



FRO-E12 - Two Post Lift

This lift offers great features and an even better price. The FRO-E12 two post automotive lift is manufactured to the highest Frontline standards. As with all Frontline Lifting products they are designed for durability and long lasting dependability.


Frontline Lifts' E12 (12,000 lb. capacity) two post lift have many great optional accessories available. Raise it even higher with optional 2' column height extensions.



ALI/ETL certification program is the industry standard for ensuring that lifts meet the ANSI national standards for safety.

Features & Benefits:

- Heavy-Duty 2-stage telescoping arms provide excellent reach and retraction to accommodate vehicle lifting points
- 13' 10" or 14' 7" adjustable column height accommodates higher profile vehicles and provides maximum headroom to work underneath vehicles
- Optional 2' column height extensions accommodate higher profile vehicles
- Heavy-Duty telescoping Screw Pads adjust to multiple heights minimizing the need for adapters
- Padded overhead shut off system prevents vehicle damage from being raised too high
- Single-point mechanical lock release system allows technician to disengage both column locks simultaneously
- Rubber door guards protect vehicle from door damage
- Premium powder coat finish provides long-lasting durability
- Plated Arm Restraints and Arm Pins inhibit rust and provide long-lasting durability

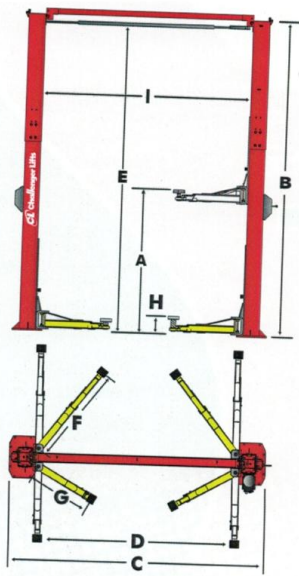

FR0-E12	
Lifting Capacity*	12,000 lb. (5443kg)
A Rise Height ¹	77 ³ / ₄ " (1975mm)
B Overall Height	Adj. 13' 10" or 14' 7" (4216mm or 4445mm)
C Overall Width	11' 7 ¹ / ₄ " (3550mm)
D Drive-thru Clearance	103" (2616mm)
E Floor to Overhead Switch	13' 3 ¹ / ₂ " or 14' 1 ¹ / ₂ " (4051mm or 4280mm)
F Arm Reach (Min.)	35 ³ / ₄ " (910mm)
G Arm Reach (Max.)	54 ¹ / ₂ " (1386mm)
H Adj. Screw Pad Height	5 ¹ / ₄ " - 6 ³ / ₄ " (133mm - 171mm)
Adj. Adapter Height (with 3" Extensions and Screw Pad)	8 ¹ / ₄ " - 9 ³ / ₄ " (210mm - 248mm)
Adj. Adapter Height (with 6" Extensions and Screw Pad)	11 ¹ / ₄ " - 12 ³ / ₄ " (286mm - 324mm)
I Inside of Columns	115" (2921mm)
Motor	2HP, Single Phase, 60Hz
Voltage	208 - 230v
Speed of Rise	66 Seconds
Max. Load Per Arm	3,000 lb. (1361kg)
Ceiling Height Required	13' 11" (4242mm)

*Lift capacity ratings are based on loads equally distributed on all four arms.

¹ Rise height measured with telescoping screw pad in highest position.

[†] Frame engaging adapters (10314 or 10318) are REQUIRED when lifting vehicles with frame construction.

E12 comes standard with:



[†] Frame engaging adapters (10314 or 10318) are REQUIRED when lifting vehicles with frame construction.

Distributed By:

FR0-E12

The E12 (12,000 lb. capacity) two post lift provides symmetric lifting capability, maximum room to work underneath vehicles.

It's adjustable height accommodates higher profile vehicles and provides ample headroom for day to day servicing.



E12:
2-stage telescoping arms for symmetric lifting (shown with standard stack adapters)