


# FRONTLINE



Model#: FRO-SA10  
Symmetric/Asymmetric 2-Post Lift  
10,000 lb. capacity

## FRO-SA10 - Two Post Lift

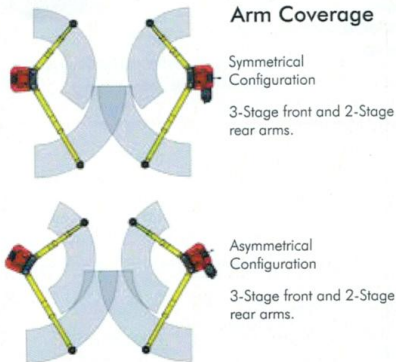

### Arm Coverage

Symmetrical Configuration  
3-Stage front and 2-Stage rear arms.

Asymmetrical Configuration  
3-Stage front and 2-Stage rear arms.

Front Line FRO-SA10 features the ability to be configured in either the symmetric or asymmetric position dependant upon the service requirements of your shop. The FRO-SA10 features 3-stage front arms that provide maximum extension and retraction ensuring safe and reliable lifting on all vehicles within rated capacity.



With adjustable height and width options, double telescoping screw pads, durable powder coat finish, plated arm restraints and pins and many other appealing features, the FRO-SA10 will accommodate the rigorous demands of a full service facility. Available in red only.





ALI/ETL certification program is the industry standard for ensuring that lifts meet the ANSI national standards for safety.

FRO-SA10		
Specifications	Symmetric Application	Asymmetric Application
Lifting Capacity	10,000 lbs.	
<b>A</b> Rise Height <sup>1</sup>	74 1/2" (1892mm)	
<b>B</b> Overall Height	11' 4 1/2" / 11' 10 1/2" (3467 / 3620mm)	
<b>C</b> Overall Height (Cylinder Extended)	11' 10 1/2" (3620mm)	
- with FRO-SA10EH2 2' height extension	13' 4 1/2" / 13' 10 1/2" (4077 / 4230mm)	
<b>D</b> Overall Base Width	10' 9" / 11' 3" (3277 / 3429mm)	10' 11 1/2" / 11' 5 1/2" (3340 / 3493mm)
<b>E</b> Drive-Thru Clearance	92 3/4" / 98 3/4" (2356 / 2508mm)	88 1/2" / 94 1/2" (2400 / 2426mm)
<b>F</b> Floor to Overhead Switch	131 1/8" / 137 1/8" (3331 / 2483mm)	
<b>G</b> Short Arm Reach	22 3/8" - 41 1/2" (568 - 1054mm)	
<b>H</b> Long Arm Reach	38 1/4" - 59" (972 - 1499mm)	
<b>I</b> Screw Pad Height <sup>2</sup>	4 3/8" - 6 1/2" (111 - 165mm)	
<b>J</b> Inside of Columns	106 1/4" / 112 3/4" (2711 / 2864mm)	101 1/2" / 107 1/2" (2578 / 2731mm)
Motor	2HP, Single Phase, 60Hz	
Voltage	208-230v	
Speed of Rise	48 Seconds	
Max Load Per Arm	2,500 lbs. (1134kg)	
Ceiling Height Required	12' (3658mm)	

**Symmetric Application**



**Asymmetric Application**



\*Lift capacity ratings are based on loads equally distributed on all four arms.  
 1 Rise height is measured with adjustable screw pads in highest position.  
 2 Specifications are listed without rubber pad, for measurements with rubber pad add 1/4" (6mm).  
 3 Overall Width of Asymmetric lift is 11' 3" / 11' 9" including Power Unit.  
 †Frame engaging adapters (10314 or 10318) are REQUIRED when lifting vehicles with frame construction.

**Features & Benefits:**

- 3-stage front arms provide greater overall arm sweep
- Set up in a symmetric or asymmetric configuration
- Adjustable height and width options accommodate varying service bay sizes
- Available with optional 2' column height extension to accommodate higher profile vehicles
- Double Telescoping Screw Pads adjust to multiple heights minimizing the need for adapters
- Rubber foot pads minimize stress to vehicles with delicate undercoatings
- Padded overhead shut off system prevents vehicle damage
- Single-point, positive engaging, mechanical lock release system allows technician to disengage both columns simultaneously
- Wide rubber door guards protects vehicle from door damage
- Premium powder coat finish provides long-lasting durability
- Plated Arm Restraints and Arm Pins inhibit rust and provide long-lasting durability
- Mirrored "S" shaped column
- Dual full stroke hydraulic cylinders that lift the vehicle weight with two cables to equalize the load



3-stage front arms provide greater overall arm sweep