



FRONTLINE

*It's So Easy,
It's Magic!*

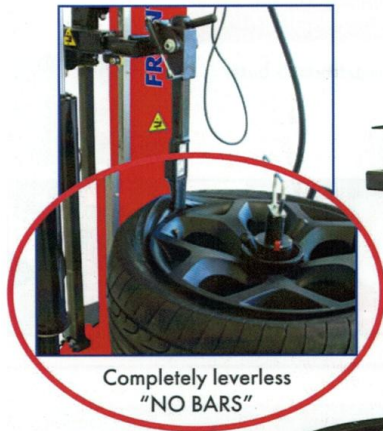

Completely leverless
"NO BARS"

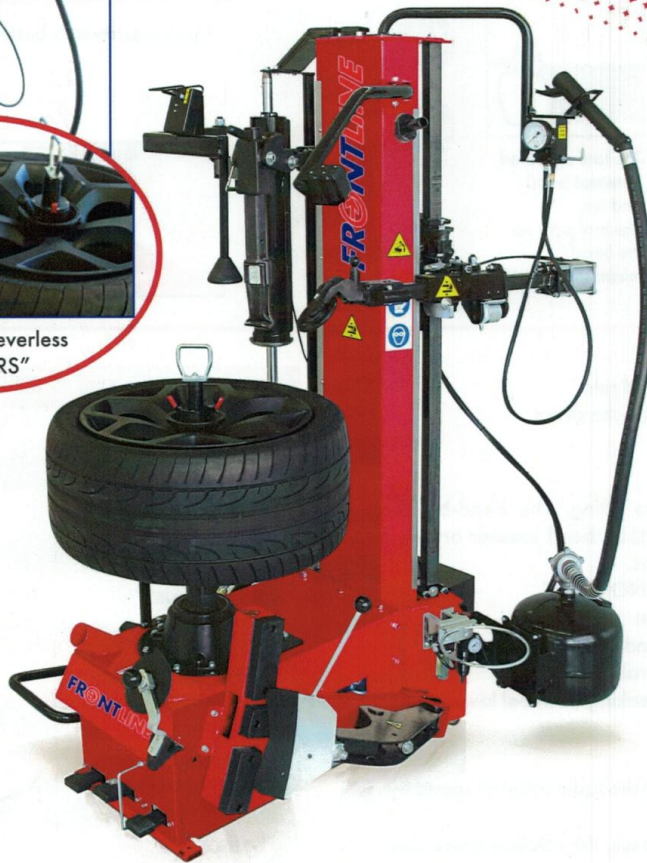

INTRODUCING: FRO-THEMAGIC.

A powerful, easy to use, lever less, high performance tire changer.


Completely lever less; this machine is equipped with the exclusive **ROBOTOOL**. **ROBOTOOL** can operate on both normal & reverse rims. Accommodating rim sizes from (inside rim) 10"-30" and a maximum tire diameter of 45" to a tire width of 15".

FRO-THEMAGIC is built on a larger frame, reinforced for rigidity to the structure and chucking table, also reinforcing the gears for longevity. Allowing the tech more ease of operation with no damage to the machine or wheels.

FRO-THEMAGIC has a **SMOOTH VARIABLE SPEED**, which allows the operator to regulate the table rotation speed by pressing the pedal; it slows down the rotation speed when the machine senses resistance and allows the machine to automatically increase torque thus avoiding any damage to the tire. Easy Roller bead loosener or Side Bead loosener equipped. Also equipped in this machine, is a pneumatic wheel lift, this allows the machine to do all the lifting for you! It's so easy it's magic!

MAGIC
FRO-THEMAGIC
EQUIPPED WITH EXCLUSIVE **ROBOTOOL**

Tire Demounting

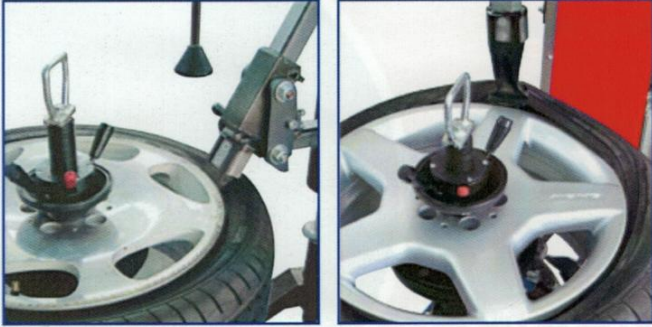

Tire Mounting




ROBOTOOL

Can operate on both normal and reverse rims.
Also run flat tires and ultra low profile tires with ease.
TPMS capable without damage.
It's so easy it's magic.



ADJUSTABLE LOCKING

3-position extendable base.

- ⇒ 10" - 26"
- ⇒ 12" - 28"
- ⇒ 14" - 30"

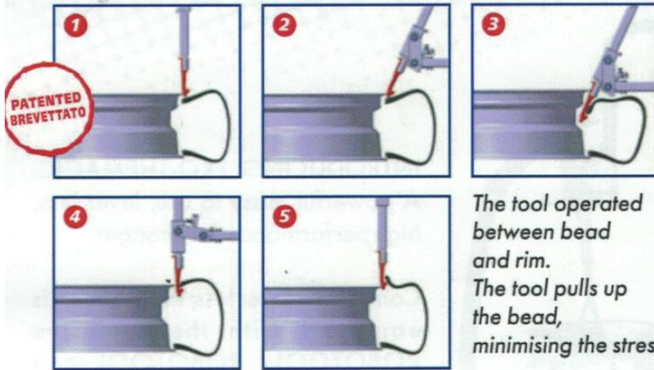

The tool operated between bead and rim.
The tool pulls up the bead, minimising the stress.

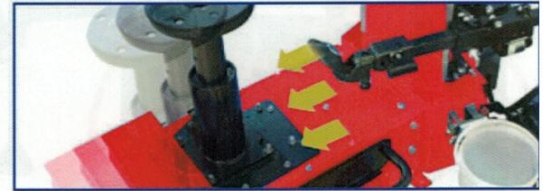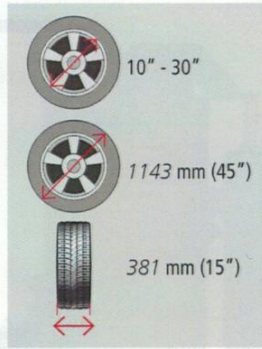

Features

The tool operated between bead and rim.
The tool pulls up the bead, minimising the stress.

EASY ROLLER

Built in wheel lift, machine does the lifting. The bead-breaking is performed by means of an EASY ROLLER bead loosner or side bead loosner, gives the technician more options.

- completely leverless operation "NO BARS"
- bead-breaking in correct position
- easy rotation of the roller for bead depression
- automatic side movement of the roller
- memorized position for bead breaking of wheel lower side
- TPMS capable without damage

RPM Variable Speed

- It allows the technician to control the table rotation speed by pressing the pedal.
- When the machine senses resistance, the rotation speed slows and automatically increases torque.


TECHNICAL DATA

Handled wheels from	10"-26"/12"-28"/14"-30"
Weight	330 kg / 750 lbs
Max wheel width	15"
Max wheel diam.	45"
Bead break. pow.	2980 lbs.
Max torque	1,000 ft lbs.
Bead breaker movement	automatic
Rotation Motor	inverter variable speed
Recommended air supply	120 - 150 PSI
Power supply	220 volt/1phase / 15 AMP
Plug Receptacle	HBL4560

STANDARD



G1000A80
Quick chuck



G1000A67 (28")



PLATE PROTECTION



CONE PROTECTION



WHEEL LIFT

OPTIONS



G1000A72
Universal flange for closed centre,
adapted also for reverse rims.



TRUCK CONE SET